

FIX 300 MASTELLO




IMEC S.r.l.
via Umberto Degola, 24
42124 - Reggio Emilia
ITALIA

tel. +39.0522.517492
fax +39.0522.920268
info@i-mec.it
bitecnology.com



MASTELLI AGITATORI SMALTI E PASTE

MIXING TANKS FOR GLAZE

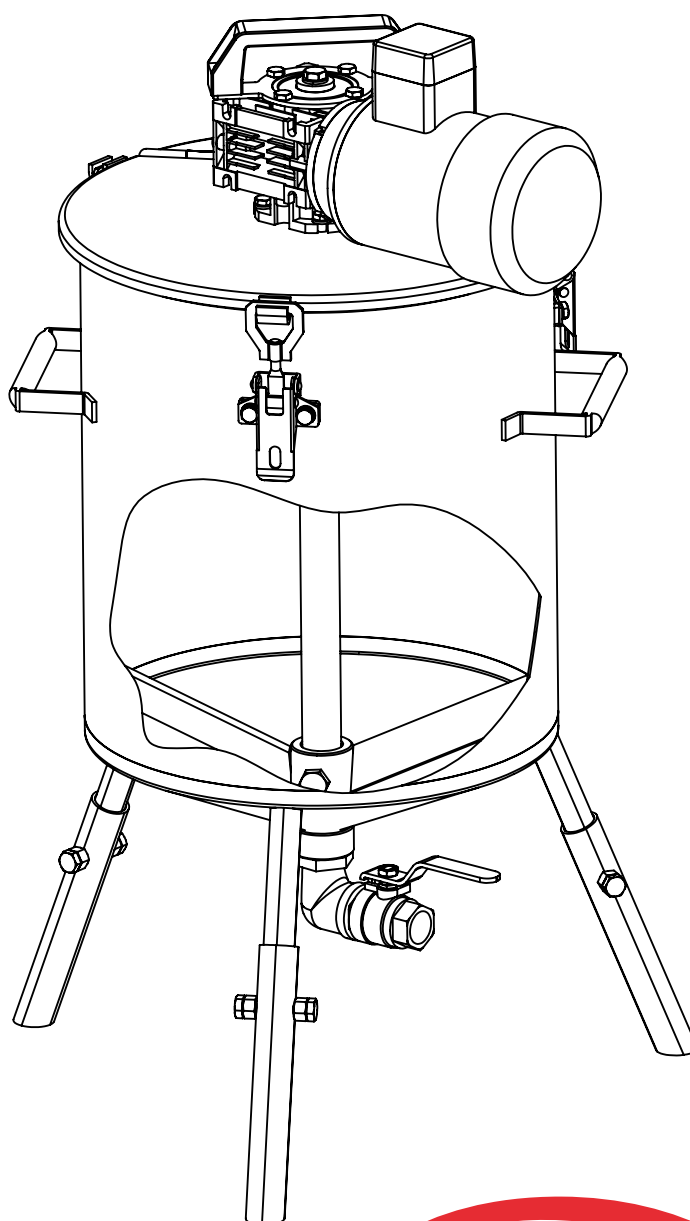

T 0004

MASTELLO FIX 300

Indicato per l'agitazione lo stoccaggio di piccole quantità di paste serigrafiche e di liquidi ed elevata densità e viscosità dove il prodotto è agitato e mantenuto in sospensione attraverso una rotazione lenta delle pale.

Applicazioni :

Accoppiato a pompe pneumatiche o elettriche di vari modelli per alimentare macchine serigrafiche rotative o piane , nell' industria ceramica o del vetro.

Vantaggi:

L'agitazione lenta delle pale evita la formazione di bolle d'aria all'interno delle paste serigrafiche dello smalto e lo snervamento del medesimo.

Materiale di costruzione a contatto con il prodotto : acc. inox aisi 304.

Le dimensioni minime ne consentono l'utilizzo in spazi ristretti .

Scarico totale garantito dal fondo conico concavo .

Massima semplicità .

Facilita di lavaggio.

Prezzo contenuto.

Optional:

Inverter .

Variatori di velocità

Motore a bassa tensione (volt 42-48-60)

Filtri .

Pompe con portate diverse o in diversi materiali.

Valvole speciali ed in diversi materiali.

Dimensioni diverse dallo standard .

FIXED TANK 300

Recommended for the agitation and storage of small quantities of serigraphic pastes and of high density and viscosity liquids where the product is agitated and maintained suspended through a slow blades rotation.

Applications:

Coupled with various models of pneumatic or electric pumps for the feeding of rotary or flat serigraphic machines in the ceramic and glass industry.

Advantages:

Low agitating blades prevents the formation of air bubbles inside the glazing serigraphic paste and the enervation of the same.

All parts in contact with the product are built with AISI 304 stainless steel

Its small dimensions facilitate its usage in small spaces even when mounted on the machine

Guaranteed full drainage from the concave conic bottom

Maximum simplicity

Easily cleaned

Low cost

Options:

Inverter

Speed converter

Low voltage motor (42-48-60 Volts)

Filters



Pumps with different capacities and materials

Special valves and of different materials

Non- Standard dimensions



Modello Model Modelo	Dimensioni : Ø x H Sizes Dimensiones	Potenza elettrica Electric power Potencia eléctrica	Capacità Capacity Capacidad
FIX 300	300 X 335	kw 0,09	lt 25
FIX 400	400 X 400	kw 0.18	lt 50

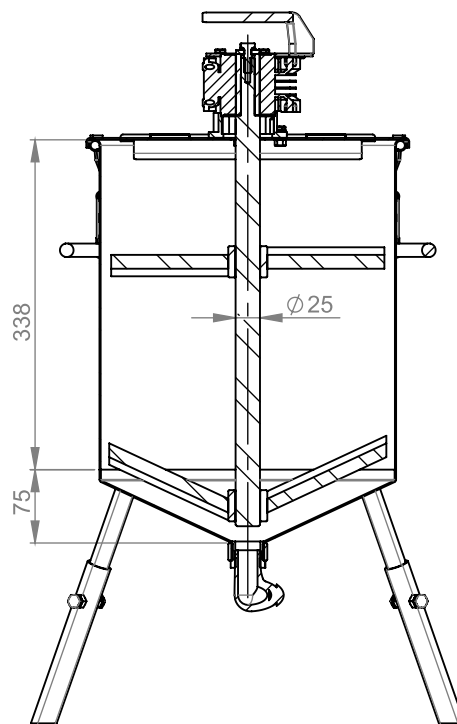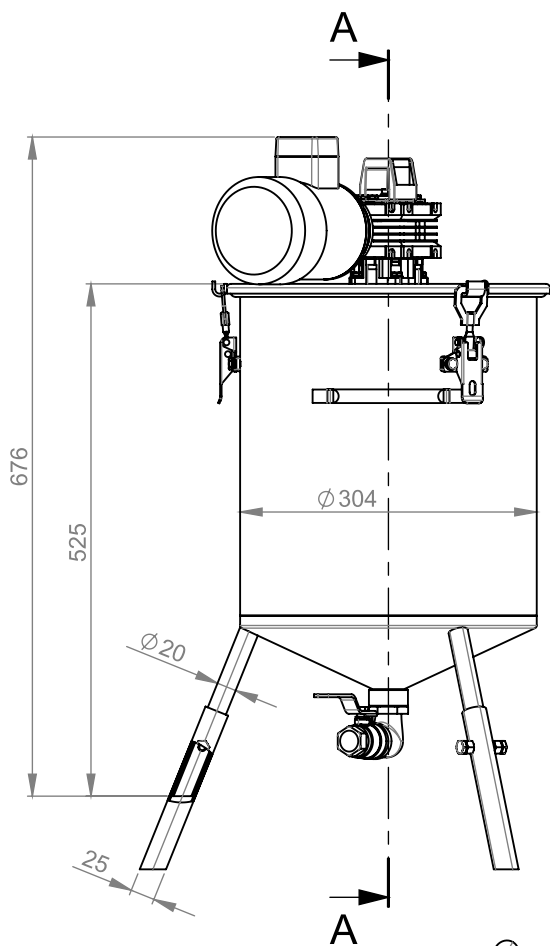

SEZIONE A-A

