

K2


MASTELLO AGITATORE K 2 600 800 900 1000

STIRRING PUMP K 2 600 800 900 1000



IMEC S.r.l.
via Umberto Degola, 24
42124 - Reggio Emilia
ITALIA

tel. +39.0522.517492
fax +39.0522.920268
info@i-mec.it
bitecnology.com

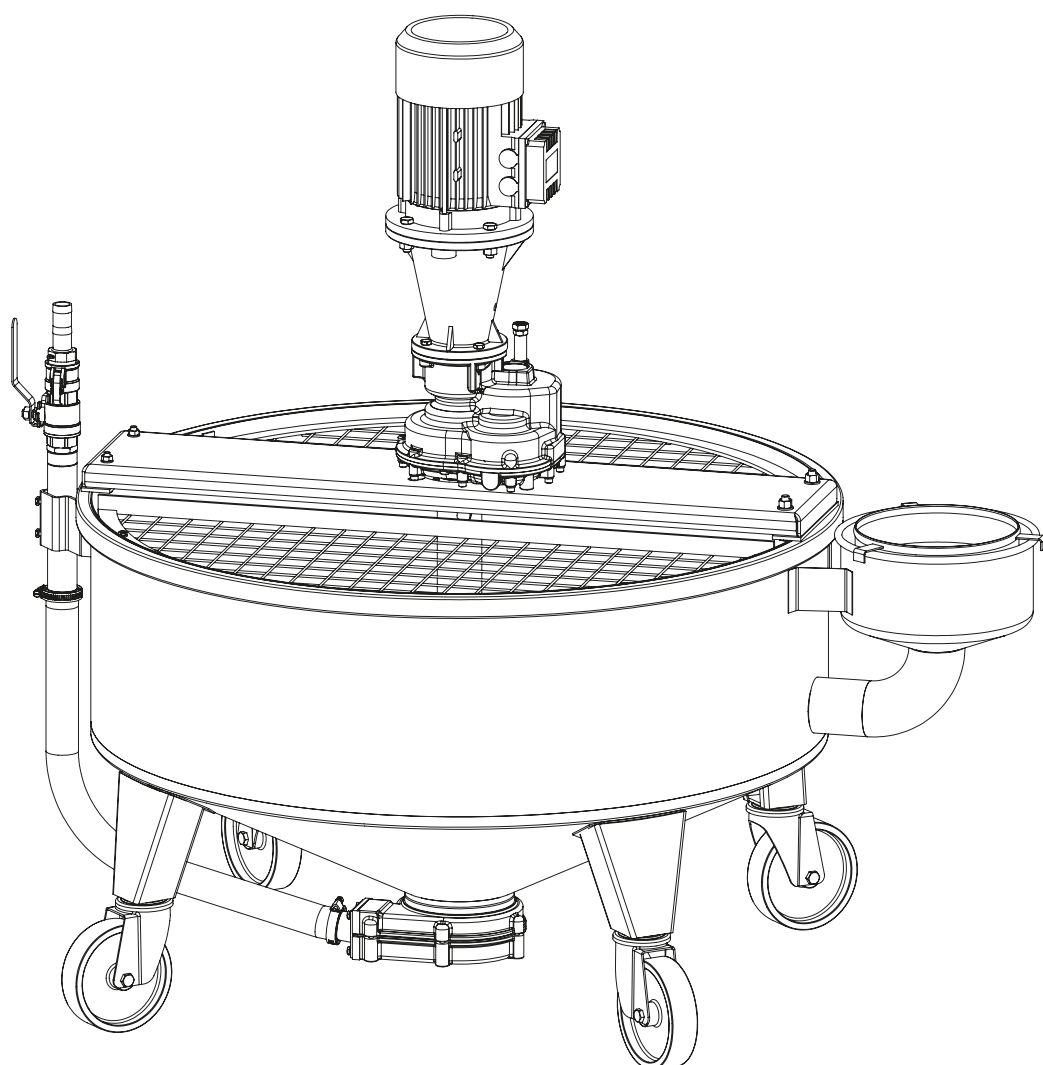

T 0014

MASTELLO CON AGITATORE LENTO E POMPA CENTRIFUGA VERTICALE COMANDATI DA UN UNICO MOTORE ELETTRICO K2 600 800 900 1000

Utilizzabile per l'agitazione ed il pompaggio di liquidi ad alta densità e viscosità.
Raccomandato anche per tutti i liquidi dove è necessario un movimento lento delle pale per agitare.

Applicazioni:

Nelle ceramiche sulle linee di smaltatura in servizio alle campane ed alle filiere.

Vantaggi:

L'agitazione lenta delle pale previene la formazione di bolle d'aria nello smalto.
La qualità elevata dei componenti utilizzati rendono la macchina estremamente duratura.
Minimo consumo energetico dato da un'unica motorizzazione per pompa e agitatore.
Riduttore coassiale ad alto rendimento.
Giunto elastico stellare.
Carcassa pompa in ghisa con rivestimento in gomma anti abrasiva.
Assenza di tenute meccaniche sulla pompa (la macchina può funzionare anche senza prodotto).
La costruzione carrellata ne facilita lo spostamento.
Scarico totale.

Optional:

Pozzetto laterale.
Coperchi in lamiera o in rete.
Inverter.
Motore a bassa tensione (volt 42-48-60).
Motore a doppia velocità.
Vibrosetaccio Lem 220.
Deferrizzatori.
Filtri.
Pompe con portate diverse o in diversi materiali.
Giranti pompa in diversi materiali.
Valvole speciali ed in diversi materiali.
Dimensioni diverse dallo standard.

TANK WITH SLOW STIRRER AND VERTICAL CENTRIFUGAL PUMP CONTROLLED BY ONE SINGLE ELECTRIC MOTOR K2 600 800 900 1000

Suitable for stirring and pumping liquids with high density and viscosity.
It is also recommended for all the liquids where it is necessary a slow movement of the blades to mix.

Applications :

In the glazing lines inside ceramics where there are bells and vena applications.

Advantages:

The slow mixing movement of the blades prevents the air bubble production inside the glaze.
The quality of its spare parts makes this machine long lasting.
Low energy consumption thanks to one single motor for both pump and stirrer.
Coaxial gearbox with high performance.
Star elastic joint.
Pump body in cast iron coated with fire proof rubber.
The absence of mechanical seals on the pump (the machine can work even without product).
The wheeled frame allows its movement.
Total discharge.

Optional:

Lateral sump.
Covers in sheet metal plate or in stainless steel net.
Inverter.
Low tension motor (volt 42-48-60).
Double speed motor.
Vibrating screen type "Lem" 220.
Iron removers.
Filters.
Pumps with different deliveries or in different materials.
Pump impellers in different materials.
Special valves and in different materials.
Sizes different from standard.



Modello Model Modelo	Dimensioni A/B mm Sizes Dimensiones	Potenza Power Potencia	peso weight kg	Capacità Capacity Capacidad
K2 600	1320/600	1,1 kw	72	lt 124
K2 800	1320/800	1,1 kw	81	lt 210
K2 900	1320/900	1,1 kw	93	lt 265
K2 1000	1320/1000	1,2 kw	105	lt 330

